



# 3GPP/ISMA Network Camera

The VIVOTEK IP7135/IP7137 is a 3GPP/ISMA-compatible network camera, offering superior image quality and efficient bandwidth by MPEG-4 implementation. Users can easily access it and receive synchronized video and audio by computers, cellphones, or media adapters with TV, anytime, anywhere for indoor surveillance and remote monitoring.



IP7135 / IP7137

## Features


- Live Video and Audio Monitoring via 2.5G/3G Mobile Phone or Media Adapter
- MPEG-4 Video Compression (Simple Profile)
- Compact Size with Stylish Design
- Easy to Install and Configure
- Optimized Synchronization of Audio and Video
- 802.11g Wireless Connection (IP7137)
- Supports 3GPP/ISMA RTSP (Real Time Streaming Protocol)
- Intelligent Motion Detection
- Superior Low Light Performance
- Excellent Image Quality with Up to 30 Frames Per Second in Full VGA Resolution

# 3GPP/ISMA Network Camera

IP7135 / IP7137



- Cell phone with 3GPP player
- ISMA compliant devices
- Real Player 10.5
- Quick Time 6.5

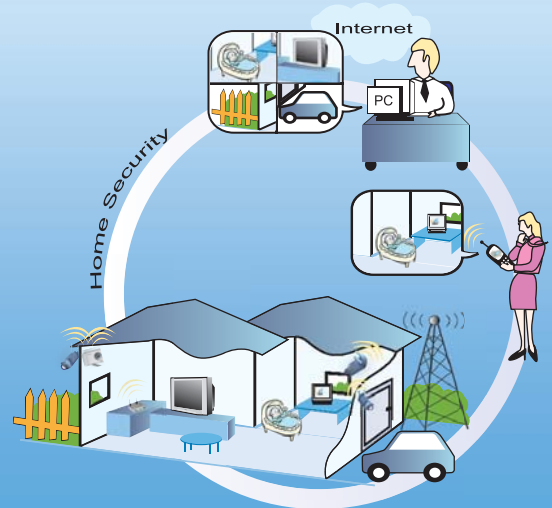

## Technical Specifications

Models	<ul style="list-style-type: none"> <li>• IP7135 (CMOS)</li> <li>• IP7137 (CMOS, wireless)</li> </ul>	Audio	<ul style="list-style-type: none"> <li>• Algorithm GSM-AMR/MPEG4 AAC</li> <li>• Supports audio mute</li> </ul>
System	<ul style="list-style-type: none"> <li>• CPU: VVTK-1000 SoC</li> <li>• RAM: 32MB SDRAM</li> <li>• ROM: 4MB FLASH ROM</li> </ul>	Microphone	<ul style="list-style-type: none"> <li>• Omni-directional</li> <li>• Frequency 50~16000Hz</li> <li>• S/N ratio More than 60dB</li> </ul>
Networking	<ul style="list-style-type: none"> <li>• Protocols UPnP, TCP/IP, RTSP/RTP/RTCP, HTTP, SMTP, FTP, Telnet, NTP, DNS, DDNS, DHCP and PPPoE</li> <li>• Ethernet 10 baseT or 100 baseT Fast Ethernet auto negotiation</li> <li>• Wireless (IP7137) 802.11g wireless LAN</li> </ul>	Security	<ul style="list-style-type: none"> <li>• ID/Password authentication</li> </ul>
Video	<ul style="list-style-type: none"> <li>• Algorithm MPEG4 simple profile for streaming video JPEG for still image</li> <li>• Features Adjustable image size, quality and bit-rate Time stamp and text caption Three configurable motion detection windows Flip &amp; mirror</li> <li>• Resolution Up to 30/25 frames at 160x120 Up to 30/25 frames at 176x144 Up to 30/25 frames at 320x240 Up to 30/25 frames at 640x480</li> </ul>	LED Indicator	<ul style="list-style-type: none"> <li>• Two color system status indicators</li> </ul>
Camera Specifications	<ul style="list-style-type: none"> <li>• 1/4" color CMOS sensor</li> <li>• Resolution: 640(H)x480(V)</li> <li>• 1.5Lux/F2.0</li> <li>• AGC/AWB/AES</li> <li>• Electronic Shutter: 1/60 to 1/15,000 sec.</li> </ul>	Dimensions	<ul style="list-style-type: none"> <li>• Depth: 34.8mm</li> <li>• Width: 109.5mm</li> <li>• Height: 77.2mm</li> </ul>
Lens	<ul style="list-style-type: none"> <li>• 4.0mm, F2.0</li> </ul>	Weight	<ul style="list-style-type: none"> <li>• Net: 150g (IP7135)</li> <li>• Net: 165g (IP7137)</li> </ul>
		Power	<ul style="list-style-type: none"> <li>• 5VDC</li> </ul>
		Operating Environments	<ul style="list-style-type: none"> <li>• Temperature: 0~50°C (32~122°F)</li> <li>• Humidity: 85% RH</li> </ul>
		EMI & Safety	<ul style="list-style-type: none"> <li>• CE, FCC</li> </ul>
		Viewing System Requirements	<ul style="list-style-type: none"> <li>• Operating system: Microsoft Windows 98 SE, ME, 2000, XP</li> <li>• Browser: Internet Explorer 5.0 or above</li> <li>• Cell phone: 3GPP player</li> <li>• Real Player 10.5</li> <li>• Quick Time 6.5</li> </ul>

All specifications are subject to change without notice.  
All other trademarks are owned by their respective companies.



6F, No.192, Lien-Cheng Rd., Chung-Ho, Taipei County, Taiwan  
Tel: +886 2 82455282  
Fax: +886 2 82455532  
E-mail: sales@vivotek.com  
Http://www.vivotek.com

P/N:011000600 Ver 4.0